

SUMITOMO Link-Belt

Hydraulic Crawler Crane

LS-238RH-2

LS-238RH-2 Basic Machine

Upper Machinery

UPPER FRAME: All-welded, stress relieved, precision machined unit.

TURNABLE BEARING WITH INTEGRAL RING GEAR

Outer race is bolted to upper frame, inner race with internal ring gear is bolted to lower frame. Swing pinion meshes with internal, integral ring gear. A machined surface is provided for mounting turntable bearing.

CONTROL SYSTEM: Remote controlled hydraulic servo. Working speed can be precisely controlled by lever stroke.

HYDRAULIC SYSTEM: System combining variable displacement axial pumps and fixed displacement gear pumps provides both independent and combined operations of all functions.

Main hoist/aux. hoist/boom hoist

Radial piston motor with counterbalance valve.

Swing motor — Axial piston motors with brakes

Travel motor — Radial piston motors with brake valves. Spring-set/hydraulic-released multiple disc brakes are fitted.

Hydraulic oil reservoir — 300 liter (66 imp. gal., 79 u.s. gal.) capacity.

LOAD HOIST ASSEMBLY: Front (main) and rear (aux.) operating drums. Each driven by the bi-directional, radial piston motor through reduction gear powering the rope drum in either direction for hoisting or lowering load.

Clutches — Hydraulic actuated, internal expanding, self adjusting 2-shoe type.

Brakes — External contracting band type, hydraulic assisted foot pedal with locking latch.

Locks — Mechanically operated drum lock pawl.

BOOM HOIST ASSEMBLY: Driven by the bi-directional, radial piston motor through reduction gear powering the rope drum in either direction for hoisting or lowering boom.

Brake — Spring applied, hydraulically released external contracting band type.

Lock — Mechanically operated drum lock pawl.

SWING: Driven by 2 sets of axial piston motor, through reduction gear.

Brakes — Positive (hydraulically applied) disc brake for operation, and negative (Spring applied, hydraulically released) disc brake for parking.

Lock — Mechanically operated pin connection house lock.

Speed — 2.1 rpm (High), 1.2 rpm (Low)

OPERATOR'S CAB: Full vision compartment with safety glass panels, the completely independent cab is insulated against noise and vibration.

COUNTERWEIGHT: Removable, 4 blocks mounted on rear of upper frame by bolts.

CATWALKS: Both sides of upper housing.

POWER UNIT:

Make & Model	Mitsubishi BDC9C
Type	Water-cooled, 4-cycle diesel engine
No. of cylinders	8
Bore & Stroke	135 x 140mm (5.3" x 5.5")

Lower Machinery

LOWER FRAME: All welded robust rolled steel, stress relieved box construction.

SIDE FRAMES: All welded robust rolled steel. Connected to lower frame by axle shim packs, removable for transportation.

SELF LOADING DEVICE: Side frames can be speedily removed and hydraulic jack cylinders allow base machine loaded onto a trailer. Travel motor pipings with self seal couplings provide quick disconnection.

ROLLERS: Heat treated, mounted on bushings with floating seals requiring no further lubrication. Double flange.

Bottom — 10 pcs. per side frame.

Top — 3 pcs. per side frame.

DRIVE SPROCKETS: Heat treated, involute splined to drive shaft mounted on antifriction bearings.

IDLERS: Heat treated, mounted on bushings with floating seals requiring no further lubrication.

TRACKS: Heat treated, self cleaning, multiple hinged shoes, 53 pcs. per side frame.

Shoe width — 965mm(3'2"), 1,118mm(3'8") (option)

TRACK TENSION ADJUSTER: Adjusted by hydraulic cylinders at the idler blocks. Tension can be automatically released when abnormal load occurred on tracks.

TRAVEL AND STEER: Radial piston motor with reduction gear is located at inner drive end of each crawler side frame. Each track is driven simultaneously or individually for straight-line travel, or pivot turn, or the tracks can be counter-rotated for spin turns.

Brake — Spring applied, hydraulically released multiple disc brakes applied automatically when control lever in neutral position.

Speed — 1.0 km/h (High), 0.5 km/h (Low)

LS-238RH-2 Crane 100 metric tons (220,500 lbs)

CRANE BOOMS. Lattice construction; round tubular main chords, alloy, hi-ten steel, with bracing of round steel tubing.

Boom connections In-line pin connections
Basic boom Two-piece, 18.30m (60') basic length, 9.15m (30') base and 9.15m (30') top section; 1.85m (6' 1") deep and 1.85m (6' 1") wide at connections

Boom point machinery Five head sheaves mounted on antifriction bearings

Boom extensions Available in 3.05m, (10') 6.1m, and (20') 9.15m, (30') lengths with pendants. Maximum boom length 73.20m (240')

Jib Two-piece, 9.15m (30') basic length with 4.55m (15') long base and top sections, 0.76m (2' 6") deep and 0.91m (3') wide at connections.

Jib extensions Available in 4.55m (15') extension. Maximum jib length 18.30m (60').

Boom plus jib length 64.05m (210') + 18.30m (60')

HOOK BLOCKS:

100 t, (220,500 lbs) five sheaves Standard
 60 t, (132,300 lbs) three sheaves Optional extra
 30 t, (66,100 lbs) one sheave Optional extra
 10 t, (22,000 lbs) no sheave Standard for jib

BOOM LIVE MAST:

Mounted on front of upper frame. Required when operate with 61.00m (200') or longer boom length.

HIGH GANTRY:

Raised and lowered by hydraulic cylinders operated inside cab.

MID POINT SUSPENSION:

Required when operate with 70.15m (230') or longer boom length.

LINE PULL AND LINE SPEED:

Drums	Root dia.	Type	Line pull	Line speed		Cable dia.
				Hoisting	Lowering	
Front (main hoist)	500mm (19.685")	Parallel grooved	15 tons (33,100 lbs)	- 60 m/min (197 ft/min) (high) - 30 m/min (98 ft/min) (low)	- 60 m/min (197 ft/min) (high) - 30 m/min (98 ft/min) (low)	26mm (1.024")
Rear (aux. hoist)	500mm (19.685")	Parallel grooved	15 tons (33,100 lbs)	- 60 m/min (197 ft/min) (high) - 30 m/min (98 ft/min) (low)	- 60 m/min (197 ft/min) (high) - 30 m/min (98 ft/min) (low)	26mm (1.024")
Boom hoist	345mm (13.583")	Parallel grooved		- 40 m/min (131 ft/min)	- 40 m/min (131 ft/min)	20mm (0.787")

notes:

1. Above line pull and line speed are based on first layer.
2. Above line speed varies with load.

HOIST REEVING:

No. of parts of line	Main hoist										Aux. hoist
	10	9	8	7	6	5	4	3	2	1	1
Max. load t	100.0	94.4	84.8	74.9	64.8	53.6	44.1	33.4	22.5	11.3	10.0
(lbs)	(220,500)	(208,100)	(187,000)	(165,100)	(142,900)	(118,200)	(97,200)	(73,600)	(49,600)	(24,900)	(22,000)

WORKING WEIGHT AND GROUND PRESSURE:

Shoe width	Weight	Pressure
965mm (3' 2")	99t (218,300 lbs)	0.74kg/cm (10.5psi)
1,118mm (3' 8")	101t (222,700 lbs)	0.65kg/cm (9.2psi)

COUNTERWEIGHT:


A 8.5t (18,700 lbs), B 6.0t (13,200 lbs), C 6.7t (14,800 lbs), D 12.6t (27,800 lbs)
 Total . . . 33.8t (74,500 lbs)

SAFETY DEVICE:

Automatic hook overhoist preventing device, automatic boom overhoist preventing device, drum lock, swing lock, safety valve in hydraulic circuit, boom angle indicator, automatic overload preventing device (optional extra).

LS-238RH-2 CRANE WORKING RANGES:

Unit: m (ft. in.)

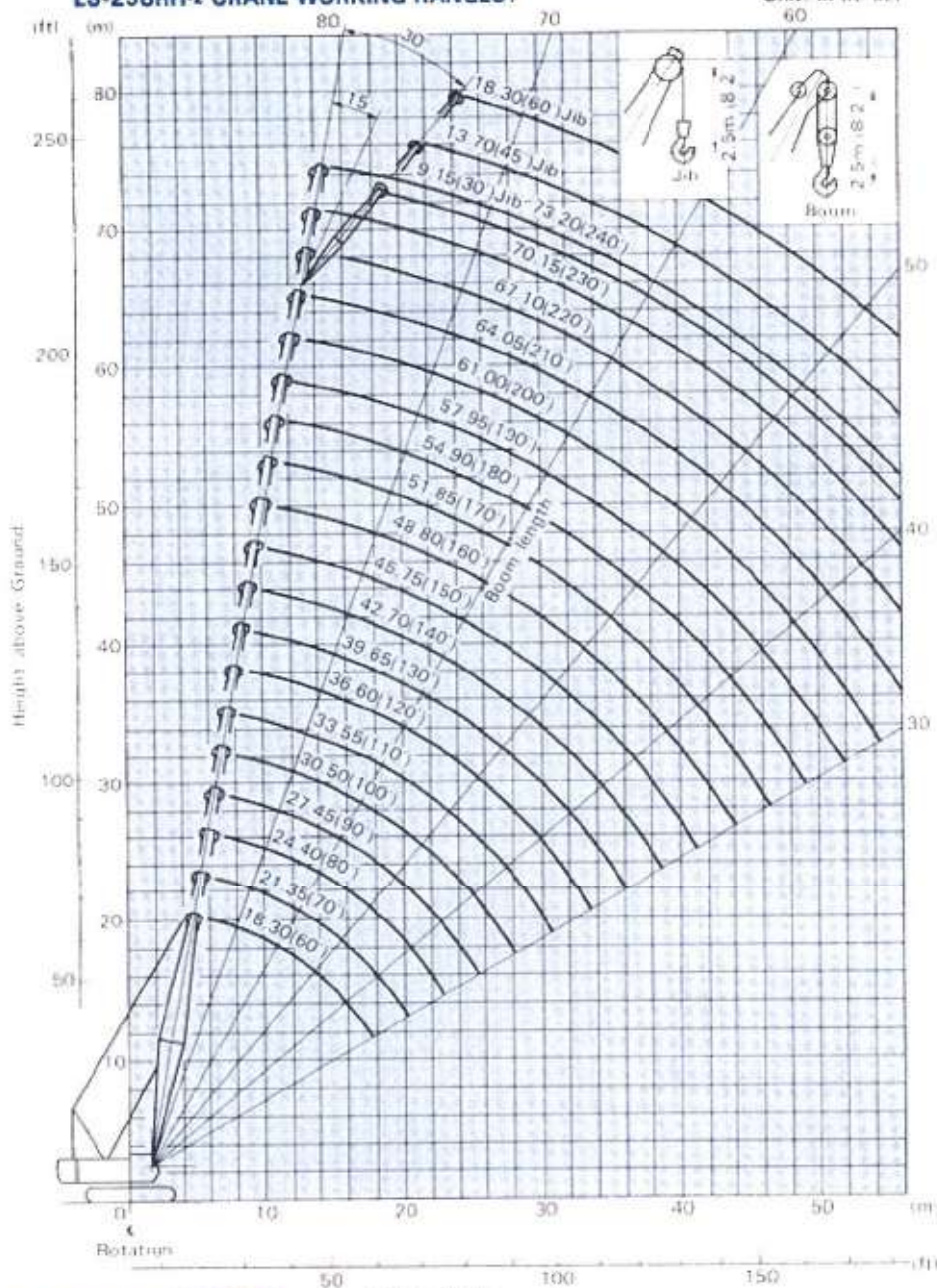

LS-238RH-2 DIMENSION:

Working Radius

A	Height, over high gantry unit	7.020m (23')
B	Height of cab	3.463m (11' 4")
C	Counterweight ground clearance	1.185m (3' 11")
D	Radius of rear end	5.400m (17' 9")
E	Center of rotation to boom foot pin	1.550m (5' 1")
F	Center to center distance of tumbler	6.540m (21' 5")
G	Overall length of crawler	7.560m (24' 10")
H	Height from ground to boom foot pin	2.280m (7' 6")
I	Overall width of house	3.300m (10' 10")
J	Ground clearance	0.495m (1' 7")
K	Center to center distance of crawler	5.000m (37' 9")
L	Overall width of crawler (with 965 mm (3' 2") shoe)	5.965m (19' 7")
M	Overall width of upper machine	4.100m (13' 5")
N	Shoe width	0.965m (3' 2")



LS-238RH-2

LS-238RH-2 CRANE CAPACITIES:

Working radius m(ft. in.)	Boom length											
	18.30 (60')	21.35 (70')	24.40 (80')	27.45 (90')	30.50 (100')	33.55 (110')	36.60 (120')	39.65 (130')	42.70 (140')	45.75 (150')	48.80 (160')	51.85 (170')
5.0 (16' 5")	100.0 (220,500)											
5.5 (18' 1")	91.3 (201,300)											
6.0 (19' 8")	81.8 (180,300)	79.0 (174,200)	75.1 (165,600)									
6.5 (21' 4")	74.0 (163,100)	70.2 (154,800)	69.9 (154,100)									
7.0 (23' 4")	63.3 (139,600)	63.2 (139,300)	63.1 (139,100)	61.9 (136,500)	57.7 (127,200)							
7.5 (24' 7")	57.1 (125,900)	56.4 (124,300)	56.0 (123,500)	55.2 (121,700)	54.3 (119,700)							
8.0 (26' 3")	51.5 (113,500)	51.3 (113,100)	51.3 (113,100)	51.2 (112,900)	50.3 (110,900)	49.2 (108,500)	45.6 (100,500)					
9.0 (29' 6")	43.4 (95,700)	43.2 (95,200)	43.1 (95,000)	43.0 (94,800)	42.8 (94,400)	42.7 (94,100)	42.6 (94,000)	40.0 (88,200)	36.6 (80,700)			
10.0 (32' 10")	37.3 (82,200)	37.2 (82,000)	37.1 (81,800)	36.9 (81,400)	36.8 (81,100)	36.7 (80,900)	36.6 (80,700)	36.4 (80,200)	34.4 (75,800)	32.6 (71,900)	30.0 (66,100)	
12.0 (39' 4")	29.0 (63,900)	28.8 (63,500)	28.7 (63,300)	28.7 (63,300)	28.6 (63,100)	28.5 (62,800)	28.4 (62,600)	28.2 (62,200)	28.1 (61,900)	28.0 (61,700)	27.2 (60,000)	25.8 (56,900)
14.0 (45' 11")	23.7 (52,200)	23.6 (52,000)	23.5 (51,800)	23.4 (51,600)	23.2 (51,100)	23.1 (50,900)	23.0 (50,700)	22.8 (50,300)	22.7 (50,000)	22.6 (49,800)	22.4 (49,400)	22.3 (49,200)
16.0 (52' 6")	19.9 (43,900)	19.8 (43,700)	19.7 (43,400)	19.5 (43,000)	19.4 (42,800)	19.3 (42,500)	19.2 (42,300)	19.0 (41,900)	18.9 (41,700)	18.8 (41,400)	18.7 (41,200)	18.6 (41,000)
18.0 (59' 1")		16.9 (37,300)	16.8 (37,000)	16.7 (36,800)	16.6 (36,600)	16.5 (36,400)	16.3 (35,900)	16.2 (35,700)	16.2 (35,700)	16.1 (35,500)	15.9 (35,100)	15.8 (34,800)
20.0 (65' 7")		14.8 (32,600)	14.7 (32,400)	14.6 (32,200)	14.4 (31,700)	14.3 (31,500)	14.2 (31,300)	14.0 (30,900)	13.9 (30,600)	13.8 (30,400)	13.7 (30,200)	13.6 (30,000)
22.0 (72' 2")			13.0 (28,700)	12.9 (28,400)	12.7 (28,000)	12.6 (27,800)	12.5 (27,600)	12.3 (27,100)	12.2 (26,900)	12.1 (26,700)	11.9 (26,200)	11.8 (26,000)
24.0 (78' 9")				11.5 (25,400)	11.3 (24,900)	11.2 (24,700)	11.2 (24,700)	11.0 (24,300)	10.9 (24,000)	10.8 (23,800)	10.6 (23,400)	10.5 (23,100)
26.0 (85' 4")					10.2 (22,500)	10.1 (22,300)	10.0 (22,000)	9.8 (21,600)	9.7 (21,400)	9.6 (21,200)	9.4 (20,700)	9.3 (20,500)
28.0 (91' 10")					9.2 (20,300)	9.0 (19,800)	8.9 (19,600)	8.8 (19,400)	8.7 (19,200)	8.6 (19,000)	8.5 (18,700)	8.3 (18,300)
30.0 (98' 5")						8.3 (18,300)	8.2 (18,100)	8.0 (17,600)	7.9 (17,400)	7.8 (17,200)	7.6 (16,800)	7.5 (16,500)
32.0 (105')							7.4 (16,300)	7.2 (15,900)	7.1 (15,700)	7.0 (15,400)	6.8 (15,000)	6.7 (14,800)
34.0 (111' 7")								6.5 (14,300)	6.5 (14,300)	6.4 (14,100)	6.2 (13,700)	6.2 (13,700)
36.0 (118' 1")								6.0 (13,200)	6.0 (13,200)	5.9 (13,000)	5.7 (12,600)	5.6 (12,300)
38.0 (124' 8")									5.5 (12,100)	5.4 (11,900)	5.2 (11,500)	5.1 (11,200)
40.0 (131' 3")										4.9 (10,800)	4.7 (10,400)	4.6 (10,100)
42.0 (137' 10")											4.2 (9,300)	4.2 (9,300)
44.0 (144' 4")												3.8 (8,400)
46.0 (150' 11")												3.5 (7,700)
48.0 (157' 6")												
50.0 (164' 1")												
52.0 (170' 7")												
54.0 (177' 2")												
56.0 (183' 9")												
No. of parts of line	10	8	8	6	6	5	5	4	4	3	3	3

Notes:

1. Capacities shown are in metric tons (lbs) and are based on 75% of minimum tipping loads – over the side – with machine standing level on firm supporting surface under ideal job conditions. Deductions from the lifting crane capacities must be made for weight of hook block. Capacities shaded are limited by strength of boom, or factors other than stability.

2. Boom five mast required when operate with 61.00m (200') or longer boom length and gantry must be raised position for all operating conditions.
3. Mid point suspension should be used when operate with 70'15" m (230') or longer boom length.

Kind of hook block t (lbs)	100 (220,500)	60 (132,300)	30 (66,100)	10 (22,000)
-------------------------------	------------------	-----------------	----------------	----------------

Unit metric tons (lbs)

54.90 (180)	57.95 (190)	61.00 (200)	64.05 (210)	64.05 (220)	70.10 (230)	73.20 (240)
23.7 (52,200)	21.7 (47,800)	18.5 (40,800)	17.2 (37,900)	16.4 (36,200)	15.0 (33,100)	12.0 (26,500)
21.9 (48,300)	20.6 (45,400)	17.6 (38,800)	16.2 (35,700)	15.3 (33,700)	14.0 (30,900)	11.3 (24,900)
18.5 (40,800)	18.3 (40,300)	15.4 (34,000)	15.2 (33,500)	14.2 (31,300)	13.0 (28,700)	10.6 (23,400)
15.5 (34,600)	13.3 (29,300)	13.2 (29,100)	13.1 (28,900)	12.6 (27,800)	12.0 (26,500)	9.9 (21,800)
11.7 (25,800)	11.5 (25,400)	11.4 (25,100)	11.3 (24,900)	11.2 (24,700)	10.6 (23,400)	9.2 (20,300)
10.4 (22,900)	10.2 (22,500)	10.1 (22,300)	9.9 (21,800)	9.8 (21,600)	9.6 (21,200)	8.2 (18,100)
9.1 (20,100)	9.0 (19,800)	8.9 (19,600)	8.7 (19,200)	8.6 (19,000)	8.5 (18,700)	7.3 (16,100)
8.2 (18,100)	8.0 (17,600)	7.9 (17,400)	7.8 (17,200)	7.6 (16,800)	7.5 (16,500)	6.4 (14,100)
7.4 (16,300)	7.2 (15,900)	7.1 (15,700)	6.9 (15,200)	6.7 (14,800)	6.6 (14,600)	5.8 (12,800)
6.4 (14,100)	6.4 (14,100)	6.3 (13,900)	6.2 (13,700)	6.1 (13,400)	6.0 (13,200)	5.0 (11,000)
6.0 (13,200)	5.9 (13,000)	5.7 (12,600)	5.6 (12,300)	5.4 (11,900)	5.3 (11,700)	4.4 (9,700)
5.5 (12,100)	5.3 (11,700)	5.1 (11,200)	5.0 (11,000)	4.8 (10,600)	4.6 (10,100)	3.8 (8,400)
5.0 (11,000)	4.8 (10,600)	4.6 (10,100)	4.4 (9,700)	4.2 (9,300)	4.0 (8,800)	3.4 (7,500)
4.5 (9,900)	4.3 (9,500)	4.1 (9,000)	3.9 (8,600)	3.7 (8,200)	3.6 (7,900)	2.9 (6,400)
4.0 (8,800)	3.7 (8,100)	3.7 (8,100)	3.5 (7,700)	3.3 (7,300)	3.2 (7,100)	2.5 (5,500)
3.5 (7,700)	3.5 (7,700)	3.3 (7,300)	3.1 (6,800)	2.8 (6,200)	2.8 (6,200)	2.1 (4,600)
3.3 (7,300)	3.1 (6,800)	2.9 (6,400)	2.7 (6,000)	2.5 (5,500)	2.4 (5,300)	1.8 (4,000)
3.0 (6,600)	2.7 (6,000)	2.6 (5,700)	2.4 (5,300)	2.2 (4,900)	2.0 (4,400)	1.5 (3,300)
	2.4 (5,300)	2.3 (5,100)	2.1 (4,600)	1.9 (4,200)	1.7 (3,700)	1.2 (2,600)
	2.1 (4,600)	1.9 (4,200)	1.8 (4,000)	1.6 (3,500)	1.4 (3,100)	1.2 (2,600)
		1.7 (3,700)	1.5 (3,300)	1.3 (2,900)	1.2 (2,600)	
			1.3 (2,900)			
3	2	2	2	2	2	2


4. When operating of the main boom peak sheave with jib on boom, following deductions in machine lifting capacities must be made.

Jib length m (ft)	9.15 (30)	13.70 (45)	18.30 (60)
Weight to be deducted t (lbs)	2.3 (5,100)	3.0 (6,600)	3.7 (8,200)

LS-238RH-2 JIB CAPACITIES:

Unit metric tons (lbs)

Jib length m (ft)	Jib set angle	Max. jib Capacities
9.15 (30)	0	10.0 (22,000)
	15	7.1 (15,700)
	30	5.0 (11,000)
13.70 (45)	0	10.0 (22,000)
	15	5.7 (12,600)
	30	3.8 (8,400)
18.30 (60)	0	10.0 (22,000)
	15	4.8 (10,600)
	30	3.1 (6,800)

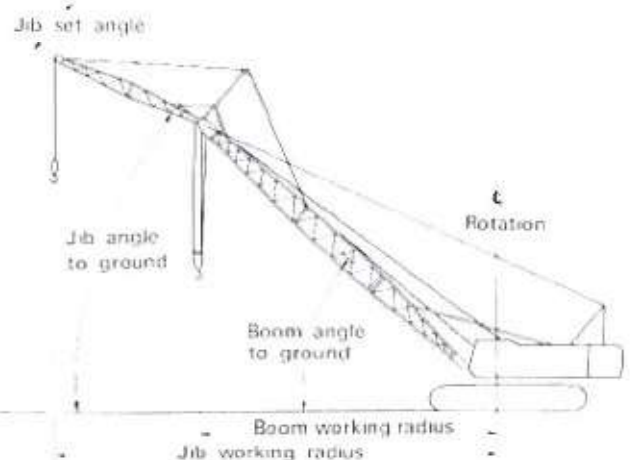

Notes:

1. The jib capacities are equal to the crane lifting capacities of the main boom on which the jib is fixed except that they are restricted by the maximum jib capacities shown above.
2. Jib working radius does not exceed the working radius of the main boom which fits the jib.
3. Deductions from the jib capacities must be made for weight of hook block.
4. Available boom length to attach the jib is 39.65m (130') to 64.05m (210').
5. The jib set angle to boom must not exceed 30°.